
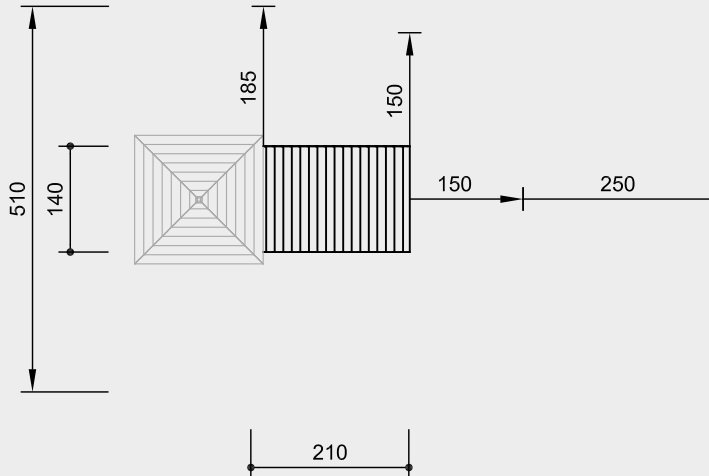


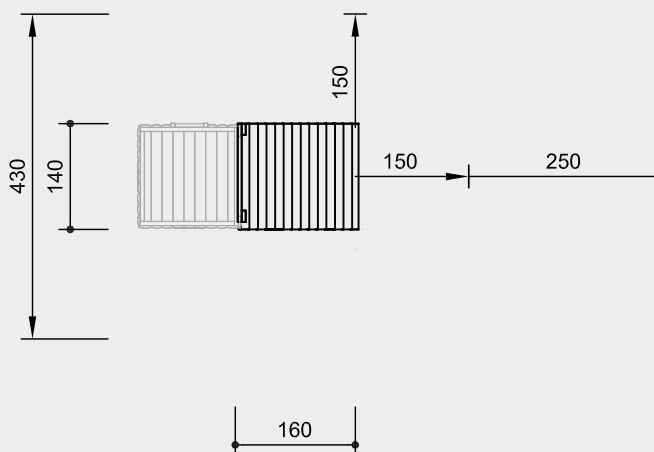



Order No. 3.67511
Inclined Wall

for attachment to Tower
with roof 2.00 m (**Order No. L3.20600**)

Order No. 3.69440
Holding Rope

for Inclined Wall
with installation height 2.00 m

Order No. 3.67514
Inclined Wall

for attachment to
Tower 1.50 m (**Order No. L3.20500**)

Order No. 3.69470
Holding Rope

for Inclined Wall
with installation height 1.50 m


Scale 1:100

Safety check according to DIN EN 1176

Attention:

Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated
mountain larch

Core-free

Sawn-timbers core-free, thus decreasing
occurrences of cracking and undesired
changes in shape

Tongue and groove

Tongue and groove planks made of
4 cm solid wood, highly resilient, no
trickling of dust / sand, protection
against direct rain

Ground anchor

All parts used for anchoring to the
ground are made of hot-dip galvanised
steel or stainless steel

Order No. 3.69440 / 3.69470
Richter Hercules type rope

Richter Hercules type rope, a combina-
tion of galvanised six-strand steel cables
and polyester yarn, diameter > 20 mm,
laid and glued with very good abrasion
resistance, strong sheathing even in the
case of damage by puncturing

Rotating rope connection

Rotatable fitting without dangerous
openings, with sintered bush with
integrated swivel to ensure the rope
untwists

**For more detailed explanation of the
quality characteristics see price list.**

Standard colour rope: rainbow

Dimensions
deviations possible
Order No. 3.67511

Installation height	2.00 m
Length	2.95 m
Width	1.30 m
Weight	150 kg

Order No. 3.67514

Installation height	1.50 m
Length	2.25 m
Width	1.30 m
Weight	120 kg



Components

1 Inclined wall with inclination 45°
and 2 steel feet

Installation information

Surfacing requirements
corresponding to a fall height of
Order No. 3.67511 ≤ 2.00 m
Order No. 3.67514 ≤ 1.50 m
(please refer to price list for more
detailed information)

Foundations
Order No. 3.67511 / 3.67514


2 items 50 x 50 x 40 cm
Excavation depth 60 cm

3.67511

3.67514

3.69440 / 3.69470

Order No. 3.69410

Serpentine Ladder with Beam


for attachment to Tower
with roof 2.00 m (Order No. L3.20600)



Order No. 3.69453

Swing Rope with Beam



for attachment to Tower
with roof 2.00 m (Order No. L3.20600)

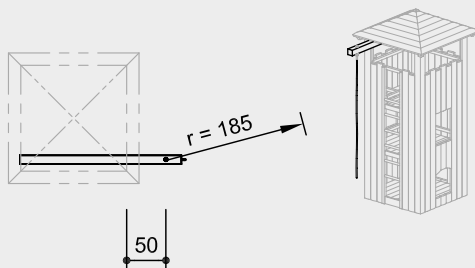

Order No. 3.69460

Firemen's Pole with Beam



for attachment to Tower
with roof 2.00 m (Order No. L3.20600)



Order No. 3.67502

Climbing Wall



for attachment to Tower
with roof 2.00 m (Order No. L3.20600)

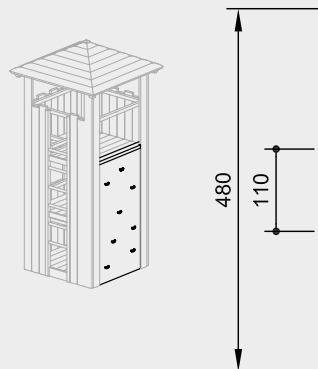

Order No. 3.67504

Climbing Wall

for attachment to Tower
with roof 2.00 m (Order No. L3.20600)

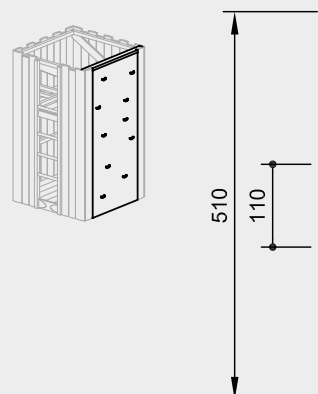


Scale 1:100

Safety check according to DIN EN 1176

Attention:

Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.

Technical changes reserved.




3.69410



3.69453



3.69460



3.67502 / 3.67504

Technical information

Wooden parts made of non-impregnated
mountain larch

Core-free

Sawn-timbers core-free, thus decreasing
occurrences of cracking and undesired
changes in shape



Order No. 3.69410 / 3.69453

Richter Hercules type rope

Richter Hercules type rope, a combina-
tion of galvanised six-strand steel cables
and polyester yarn, diameter > 20 mm,
laid and glued with very good abrasion
resistance, strong sheathing even in the
case of damage by puncturing



Standard colour rope: rainbow

Order No. 3.69460

Firemen's pole made of stainless steel,
glass bead blasted, Ø 42 mm

Order No. 3.67502 / 3.67504

Plywood

Plywood made of mountain larch,
three-layer (3 cm) or five-layer (4 cm).
High dimensional stability,
waterproof, glued according to
DIN EN 13353:2011



For more detailed explanation of the quality characteristics see price list.

Professional climbing grips made of a
mixture of sand-synthetic resin with safe
anti-rotation system against unintended
twisting of the grips

Dimensions

(small deviations possible)

Order No. 3.69410 / 3.69453 / 3.69460

Installation height of cross beam 3.10 m

Order No. 3.67502 / 3.67504

Height 2.00 / 2.30 m

Width 1.10 m

Components

Order No. 3.69410 / 3.69453 / 3.69460

1 Cross beam with combination element

Order No. 3.67502

1 Climbing wall, attached
with 8 climbing grips

Order No. 3.67504

1 Climbing wall, attached
with 10 climbing grips

Installation information

Surfacing requirements
corresponding to a fall height of
Order No. 3.69410 - 3.67502 ≤ 2.00 m
Order No. 3.67504 ≤ 3.00 m
(please refer to price list for more
detailed information)

Foundations

Order No. 3.69410 / 3.69460

1 items 30 x 30 x 30 cm

Excavation depth 50 cm

Order No. 3.69453

without foundation