

Play value

We developed a new version with a cross beam made of steel to give the Toddler's Twin Swing a special design. The sophisticated corner connection ensures extra stability for the entire construction. No playground is complete without a swing. It is important that children are offered the right equipment to promote development. Swinging to-and-fro is a basic movement and is not just fun for children. Swinging releases stress, has a comforting effect and is very enjoyable, especially done together next to one another.



Order No. 6.12020 Toddler's Swing – special



Order No. 6.12720 Toddler's Twin Swing – special

Fundamental characteristics

- Aesthetically appealing design
- Incentive for playing: repeating familiar activities
- Movement: swinging, jumping off

Recommended for

- Children under 3 years
- Kindergarten children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

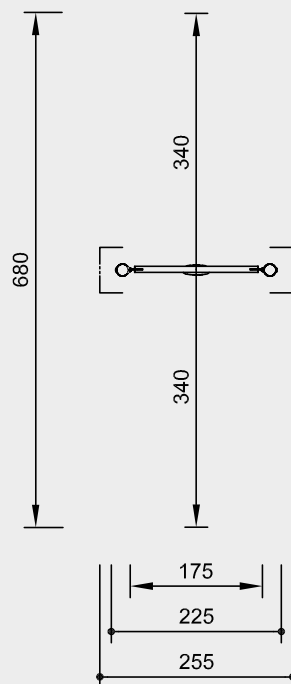

Toddler's Swing – special Toddler's Twin Swing – special



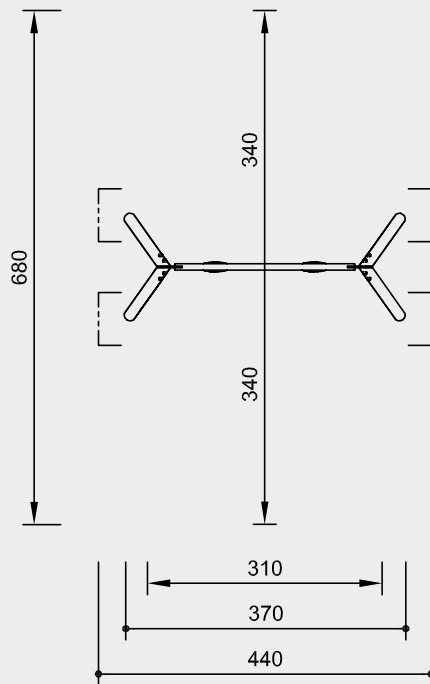
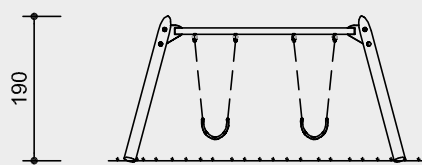
6.12020



6.12720

Order No. 6.12020
Toddler's Swing – special


Safety distance →
 Device dimensions —●—
 Functional distance —|—

Order No. 6.12720
Toddler's Twin Swing – special


Scale 1:100

Safety check according to DIN EN 1176

Components
Order No. 6.12020
Toddler's Swing – special

- 1 Swing with steel feet and cross beam made of steel
- 1 Toddler belt seat with chains

Order No. 6.12720
Toddler's Twin Swing – special

- 1 Swing with steel feet and cross beam made of steel
- 2 Toddler belt seats with chains

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.00 m (please refer to price list for more detailed information)

Foundations
Order No. 6.12020

2 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Order No. 6.12720

4 items 60 x 70 x 40 cm
 Excavation depth 60 cm

Attention:

**Exact measurements may vary;
 for all installation dimensions refer
 to current installation instructions.**
 Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced


Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel


Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt


Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood


Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary


Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel


Cross beam made of steel

Swing cross beam made of hot-dip galvanized steel. Optimized swing geometry with rigid corner connections, thus allowing for smaller foundations and easier foundation covering


Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten


For more detailed explanation of the quality characteristics see price list.

Flexible swing seat made of steel reinforced rubber

Dimensions

(small deviations possible)

Order No. 6.12020
Toddler's Swing – special

Height	1.95 m
Vertical clearance	1.70 m
Width	2.25 m
Weight	130 kg

Order No. 6.12720
Toddler's Twin Swing – special

Height	1.90 m
Vertical clearance	1.70 m
Width	3.70 m
Weight	180 kg



6.12020



6.12720