





**Order No. 3.68301**  
**Inclined Balancing Beam**  
 for attachment to Platform 1.50 m



Safety distance →  
 Device dimensions —●—  
 Functional distance —|—

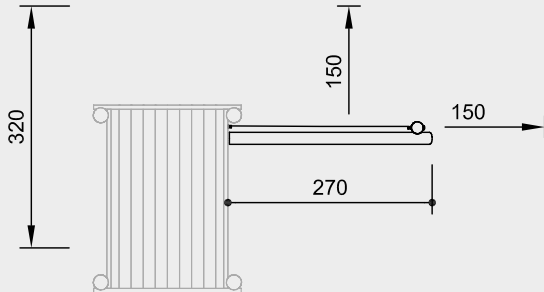

**Order No. L3.69350**  
**Vertical Climbing Net**  
 for attachment to Platform

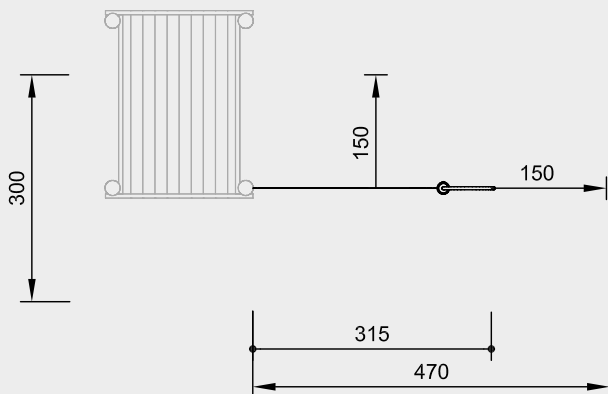

Scale 1:100

Safety check according to DIN EN 1176

**Components**

**Order No. 3.68301**  
**Inclined Balancing Beam**

- 1 Inclined balancing beam
- 1 Stand post with steel foot and chain handrail

**Order No. L3.69350**  
**Vertical Climbing Net**

- 1 Vertical net with 1 stand post with steel foot
- 1 Bent fireman's pole

**Installation information**

Surfacing requirements corresponding to a fall height of  $\leq 1.50$  m (please refer to price list for more detailed information)

**Foundations**

- Order No. 3.68301**  
 1 item 60 x 60 x 60 cm  
 Excavation depth 80 cm  
**Order No. L3.69350**  
 1 item 60 x 60 x 60 cm  
 Excavation depth 80 cm  
 1 item 55 x 40 x 30 cm  
 Excavation depth 50 cm

**Attention:**

**Exact measurements may vary; for all installation dimensions refer to current assembly instructions.**  
 Technical changes reserved.

**Technical information**

Equipment made of mountain larch

**Order No. 3.68301**

**Peeled white**

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



**Bevel cut**

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



**Chains**

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



**Order No. L3.69350**

**Peeled white**

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



**Richter Hercules type rope**

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter  $> 20$  mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



**Aluminium rope pressing**

Aluminium rope pressing, cylindrically pressed, with rounded ends



**S-connectors**

S-connectors  $\varnothing 8.1$  mm, made of high-quality stainless steel, rounded



**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



**For more detailed explanation of the quality characteristics see price list.**

Firemen's pole of stainless steel, glass bead blasted,  $\varnothing 42$  mm

**Dimensions**


(small deviations possible)

**Order No. 3.68301**

Length 3.00 m  
 Weight 100 kg

**Order No. L3.69350**

Height of net 2.00 m  
 Net size 1.75 x 2.50 m  
 Weight 70 kg



3.68301





L3.69350

### Order No. 3.67499

#### Inclined Wall



for attachment to Platform 2.00 m

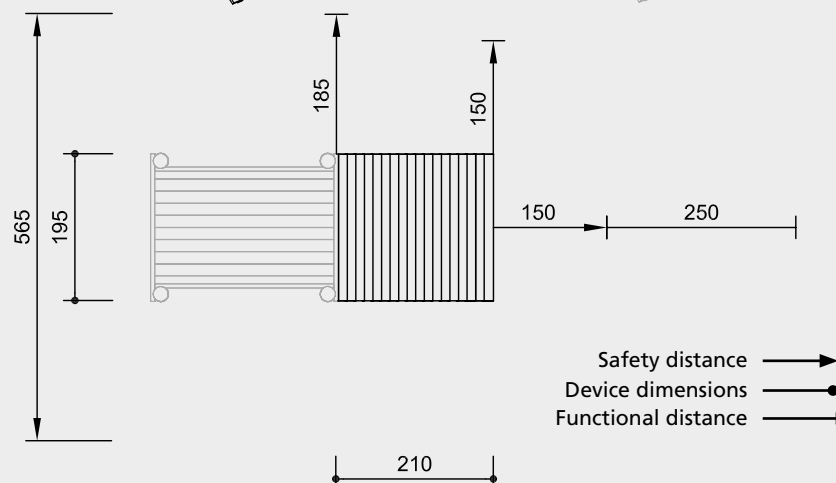

### Order No. 3.67522

#### Inclined Wall


for attachment to Platform 1.50 m

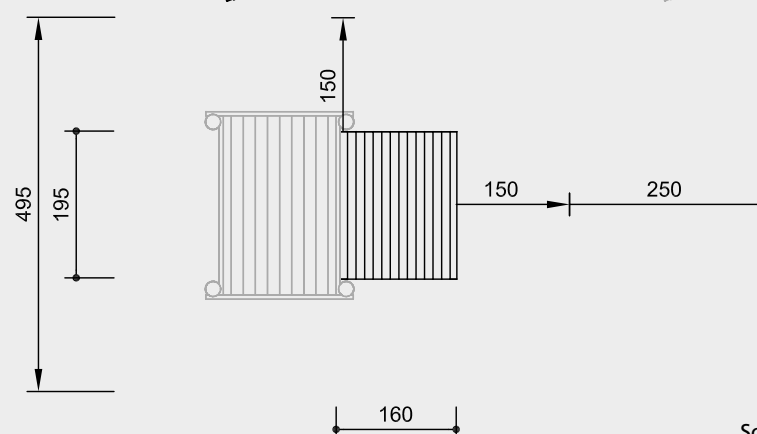

### Order No. 3.69440

#### Holding Rope


for Inclined Wall,  
installation height 2.00 m



### Order No. 3.69470

#### Holding Rope

for Inclined Wall,  
installation height 1.50 m



## Technical information

### Order No. 3.67499 / 3.67522

Equipment made of non-impregnated mountain larch

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



#### Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



#### Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



### Order No. 3.69440 / 3.69470

#### Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



#### Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



#### Rotating rope connection

Rotatable fitting without dangerous openings, with sintered bush with integrated swivel to ensure the rope untwists



### For more detailed explanation of the quality characteristics see price list.

Standard colour rope: rainbow

#### Dimensions

(small deviations possible)

#### Order No. 3.67499

Installation height	2.00 m
Length	2.90 m
Width	2.00 m
Weight	200 kg

#### Order No. 3.67522

Installation height	1.50 m
Length	2.20 m
Width	2.00 m
Weight	150 kg

#### Components

1 Inclined wall with inclination 45° and 2 steel feet

#### Installation information

Surfacing requirements corresponding to a fall height of  
**Order No. 3.67499** ≤ 2.00 m  
**Order No. 3.67522** ≤ 1.50 m  
 (please refer to price list for more detailed information)

#### Foundations

### Order No. 3.67499 / 3.67522


2 items 50 x 50 x 40 cm  
 Excavation depth 60 cm

Safety check according to DIN EN 1176


#### Attention:

**Exact measurements may vary;  
 for all installation dimensions refer  
 to current assembly instructions.**

Technical changes reserved.



3.67499



3.67522



3.69440 / 3.69470

Scale 1:100