

Play value

This exercise can be conducted alone or with a partner. The aim is to throw and catch a ball which is suspended on a pendulum. The equipment is installed with buffers which prevent the ball hitting the player or their training partner. This exercise trains the movement of the hands, arms and shoulders. It contributes to improving mobility, reactions and the sense of rhythm. In addition, this exercise trains coordination and the playful aspect gets people used to working together.

Recommended for

- Young people
- Adults
- Older people
- Public play areas without supervision, such as playgrounds, parks or similar




Swinging Ball suspension technically modified.

Swinging Ball



11.02600

Order No. 11.02600
Swinging Ball

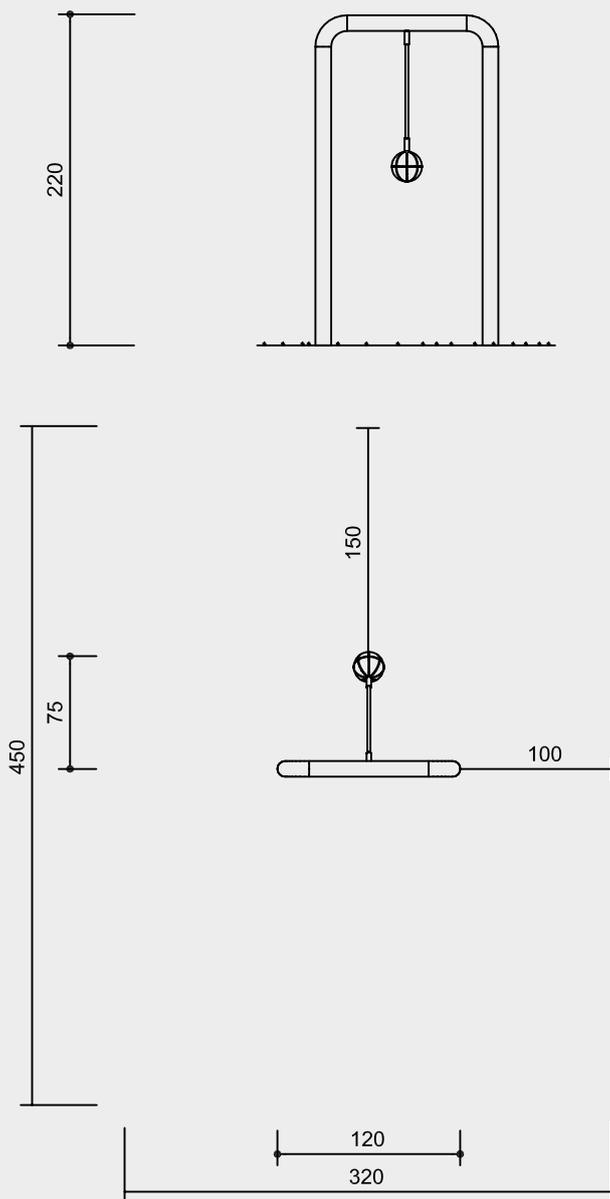

Technical information

Equipment made of stainless steel

Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

Tube diameter 104 mm

Ball, Ø 20 cm, made of thick-walled, moisture-proof rubber material, standard colour rope: blue

Dimensions

(small deviations possible)

Height	2.20 m
Width	1.20 m
Depth including oscillation to both sides	1.50 m
Weight approx.	40 kg

Safety

This equipment is not playground equipment within the scope of EN 1176 and therefore is also not subject to the requirements of this standard. Nevertheless, it is complied with where appropriate.

Components

1 Completely assembled piece of equipment for dowelling

Installation information

Surfacing
no requirements

Foundations
2 items 50 x 50 x 40 cm
Excavation depth 60 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.



11.02600