



Photo © Phil Wilkinson

Play value

The wooden Tractor with trailer is very attractive to young children because of its friendly material. It enables children to practice simple movements and role-play.

Fundamental characteristics

- Child proportions according to ergonomic requirements
- Appealing design
- Natural wooden surface which appeals to the senses
- Incentive for playing: rotating steering wheel, seat, trailer
- Movement: climbing up, holding on
- Experiences: wood in its natural form with year rings, cracks etc.

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Private play areas without supervision, such as camp sites or similar




Order No. 4.24000 Tractor with Order No. 4.24010 Trailer for Tractor, Photo © Phil Wilkinson

**Tractor
Trailer for Tractor**




Order No. 4.24010 Trailer for Tractor



4.24000



4.24010

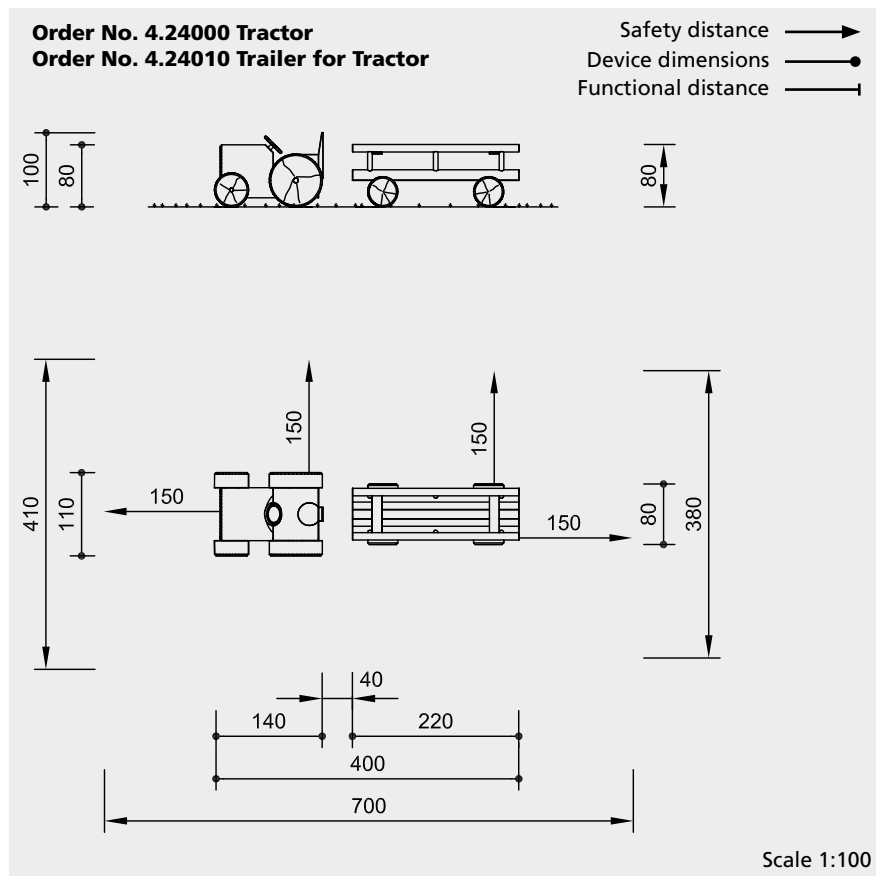

Safety check according to DIN EN 1176

Components

Order No. 4.24000 Tractor

- 1 Tractor
- 2 Foundation irons

Order No. 4.24010 Trailer for Tractor

- 1 Trailer
- 2 Foundation irons

Installation information

Surfacing requirements corresponding to a fall height ≤ 1.00 m (please refer to price list for more detailed information)

Foundations (only necessary to immobilise the equipment)
 2 items each 30 x 30 x 30 cm
 Excavation depth 50 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer to current assembly instructions.
 Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



For more detailed explanation of the quality characteristics see price list.

Dimensions


(small deviations possible)

Order No. 4.24000 Tractor


Height	1.00 m
Length	1.40 m
Width	1.10 m
Weight	350 kg

Order No. 4.24010 Trailer for Tractor

Height	0.80 m
Length	2.20 m
Width	0.80 m
Weight	190 kg



4.24000



4.24010