



Special version, posts made of square timber



Special version, posts made of square timber

Play value

The Belt Path is an ideal play item for energetic, harmless fun. The rubber belt stretched between the support posts creates a rebound effect. Particularly interesting games can be played on it when it is stretched out over several sections up to 14 metres in length. The Belt Path is suited as equipment alongside paths, especially areas predominantly used by adolescents. They also enjoy the Belt Path as a meeting point.

Fundamental characteristics

- The interchangeable sag of the rubber fields enables the rebound effect
- The moveable middle axis avoids wear and increases play fun
- Incentive for playing: rubber surface, curiosity
- Movement: jumping, running, rolli-cking about, sitting, lying

Recommended for

- School children
- Young people
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar




Photo © Monica Bedmar


Belt Path



Special version, posts made of round timber



L6.64710

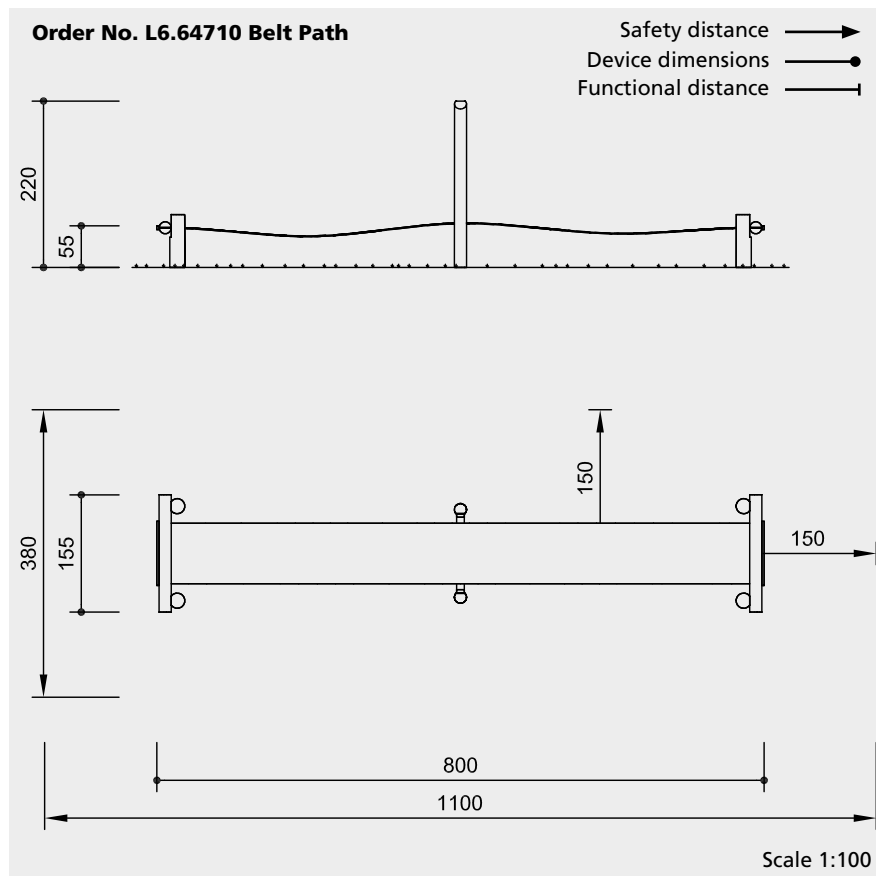

Safety check according to DIN EN 1176

Components

- 1 Walkway of double steel reinforced rubber belt
- 2 Distance timbers
- 2 End frames made of hot-dip steel tube
- 2 Cross beams made of larch
- 1 Middle frame made of larch with steel feet and roller
- 2 Distance battens

Special lengths on request

Installation information

Surfacing requirements corresponding to a fall height of ≤ 0.60 m recommendation: fall height as ≤ 1.00 m (please refer to price list for more detailed information)

Foundations
 2 items 80 x 180 x 60 cm
 Excavation depth 80 cm
 2 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
 Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch, steel

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood



Steel reinforced rubber belt

Two-way steel reinforced rubber belt, total thickness approx. 11 mm, nearly indestructible



Roller bearings

High-quality roller bearings made of chrome steel or stainless steel for rotating elements, easy to maintain and exchange, sealed




For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Length	8.00 m
	(possible up to 14.00 m)
Belt width	0.80 m
Thickness	11 mm
Weight	450 kg



L6.64710