



Order No. L6.96000 , special version



Order No. L6.98000 Goal

Play value

Children like to practice their skills. Therefore, a playground should also provide equipment that is suitable for a range of exercises. The children's degree of success determines, amongst other things, how they see themselves within the group. The horizontal bars are especially suited to allow these sorts of activities, e.g. forward rolls for self-evaluation.

The Ball Wall allows children to test their ball skills just like the big stars. The Ball Wall encourages playful and exciting competitions.

Fundamental characteristics

- Incentive for playing: repeating familiar activities
- Movement: balancing, whole body activities, races, ball skills, gymnastic-like exercises

Recommended for

- Kindergarten children
- School children
- Young People
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds parks or similar



Order No. L6.96000 Horizontal Bars in different heights, special version made of square timber

**Horizontal Bars in different heights
Goal
Ball Wall**

Components

Order No. L6.96000

Horizontal Bars in different heights

- 4 Stand posts with steel feet
- 3 Horizontal bars, length 1.20 m

Order No. L6.98000

Goal

- 2 Stand posts with steel feet
- 1 Cross beam


Order No. L6.99000

Ball Wall

- 1 Complete piece of equipment with steel feet




Order No. L6.99000 Ball Wall, technical changed



L6.96000




L6.98000




L6.99000

Order No. L6.96000
Horizontal Bars in different heights


Safety distance →
 Device dimensions ●
 Functional distance —

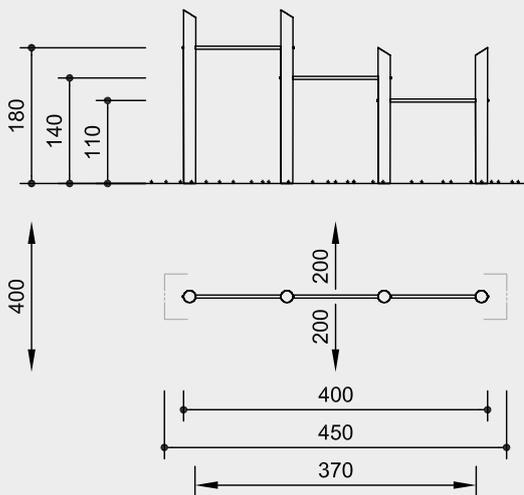

Order No. L6.98000
Goal

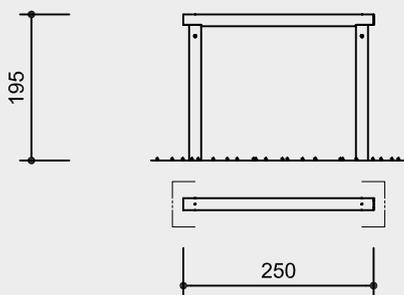

Order No. L6.99000
Ball Wall

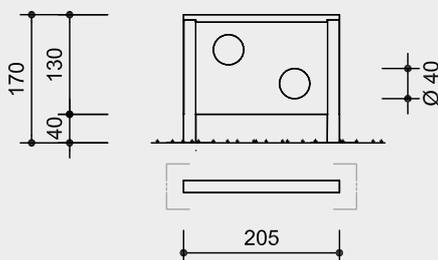

Scale 1:100

Safety check according to DIN EN 1176

Dimensions

(small deviations possible)

Order No. L6.96000

Horizontal Bars in different heights

Heights of bars 1.10 / 1.40 / 1.80 m
 Width 4.00 m
 Weight 200 kg

Order No. L6.98000

Goal

Height 1.95 m
 Width 2.50 m
 Weight 100 kg

Order No. L6.99000

Ball Wall

Height 1.70 m
 Width 2.05 m
 Weight 150 kg

Installation information

Surfacing requirements corresponding to a fall height of **Order No. L6.96000** ≤ 2.00 m (please refer to price list for more detailed information)

Foundations

Order No. L6.96000
 4 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Order No. L6.98000
 2 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Order No. L6.99000
 2 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Technical information

Equipment made of mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Order No. L6.96000

Horizontal Bars in different heights

As above, but in addition with

Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Horizontal bars made of stainless steel, glass-bead blasted, Ø 30 mm

Order No. L6.98000

Goal

As above, but in addition with

End grain connector

End grain connector as special fitting for the adjustable connection of horizontal and vertical timber



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Order No. L6.99000

Ball Wall

As above, but in addition with

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011




For more detailed explanation of the quality characteristics see price list.

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.


Technical changes reserved.



L6.96000



L6.98000



L6.99000